

PRODUCT DATA SHEET

Kao Wall/Ceiling - Kit F



DESIGN BY :

Bruno Houssin

MATERIALS :

Painted Aluminium

DESCRIPTION :

Series of wall- or ceiling-mounting lighting structures with indirect lighting using 24W and 54W T16 fluorescent lamps, intended for the illumination of spaces such as entrance halls, reception areas, corridors, meeting rooms, etc. Aluminium body with white paint finish. 40x40mm square section modules. Distance to wall or ceiling: 16cm. Each structure is composed of pre-assembled and pre-wired sub-units, with a drilling stencil for placing the fixing points. Electrical connection via quick connectors. Electronic control gear. Dust protection cover in polycarbonate. Complies with standard EN60598-1 and other specific standards.

Light emission

Indirect

IP20

TECHNICAL DATA SHEET

Features

Product name:	Kao Wall/Ceiling - Kit F
Article Code:	M113120
Colour:	White
Material:	Painted Aluminium
Series:	Architectural
Environment:	Indoor
Area contract:	

OPTICS

Emission:	Indirect
-----------	----------

DIMENSIONS


Length:	(cm) 414
Width:	(cm) 215
Cutout shape:	
Weight:	16
Glow Wire Test:	850 °

LAMPS NOT INCLUDED

Category:	FLUO
Number:	2
Lbs:	T16
Watt:	24
Socket:	G5
Type:	FDH-24
Luminous Flux (lm):	1750
Colour Rendering:	85
Colour temperature (K):	3000
Duration (h):	20000

Category:	FLUO
Number:	3
Lbs:	T16
Watt:	54
Socket:	G5
Type:	FDH-54
Luminous Flux (lm):	4450
Colour Rendering:	85
Colour temperature (K):	3000
Duration (h):	20000

Dimensions

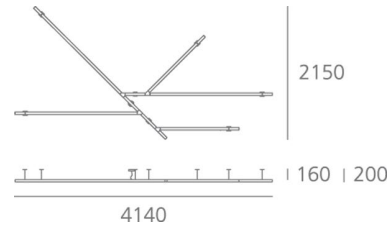

LAMP

IP20

ELECTRICAL

Starter:	Electronic Integrated
Voltage:	220V-240V