

BEGA**31 203**

Wall luminaire



Project · Reference number


Date

Product data sheet

Application


Wall luminaire for many lighting tasks on or in buildings.
Ideal for places where a soft and uniform light distribution is required.

Product description

Luminaire made of aluminium alloy, aluminium and stainless steel
Opal glass
Silicone gasket
Mounting plate with 2 fixing holes \varnothing 4,5 mm · 40 mm spacing
1 cable entry for mains supply cable up to \varnothing 10,5 mm max. $3 \times 1,5^{\square}$
Connection terminal 2.5^{\square}
Earth conductor connection
Lampholder E 14
Safety class I
Protection class IP 44
Protected against granular foreign bodies > 1 mm and splash water
Impact strength IK04
Protection against mechanical impacts < 0.5 joule
 – Safety mark
CE – Conformity mark
Weight: 1.6 kg

Light technique

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page www.bega.com.

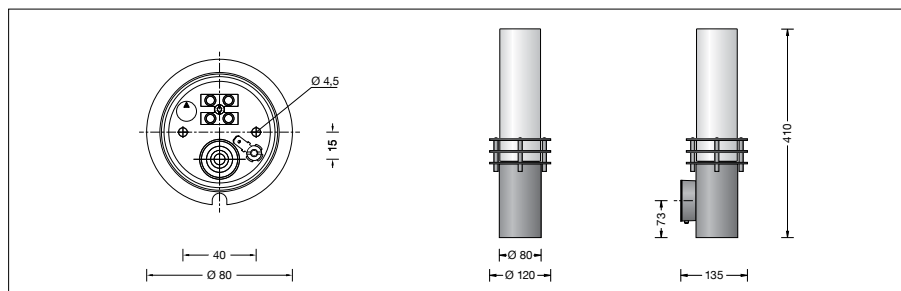

Lamps

Luminaire with lampholder E 14
Lamp output max. 60 W

For this luminaire we recommend the following BEGA LED lamps:

13 552 LED 4 W · 470 lm · 2700 K

13 554 LED 5 W · 470 lm · 2700 K
dimmable

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.