

BEGA**50 747.4**

Pendant luminaire for indoor use

Project · Reference number

Date

Product data sheet**Application**

LED Pendant luminaire downlight · indoor
luminaire with aluminium housing for non-glare
light deflected downwards.

Product description

LED Pendant luminaire downlight »STUDIO LINE«
Aluminium luminaire housing,
velvet white enamel finish,
Inside hue matt brass
Trim ring · Chrome finish
Light-diffusing silicone lens
Reflector made of pure anodised aluminium
White flex suspension $3 \times 0,75^{\square}$
Overall length of luminaire approx. 2000 mm
Connection terminal 2.5^{\square}
Earth conductor connection
LED power supply unit
220-240 V \sim 0/50-60 Hz
DC 176-280 V
Safety class I
CE – Conformity mark
Weight: 1.4 kg

Inrush current

Inrush current: 5 A / 50 μ s
Maximum number of luminaires of this
type per miniature circuit breaker:
B10A: 31 luminaires
B16A: 50 luminaires
C10A: 52 luminaires
C16A: 85 luminaires

Lamp

Module connected wattage	8.1 W
Luminaire connected wattage	9.8 W
Rated temperature	$t_a = 25^{\circ}\text{C}$
Ambient temperature	$t_{a\text{max}} = 35^{\circ}\text{C}$

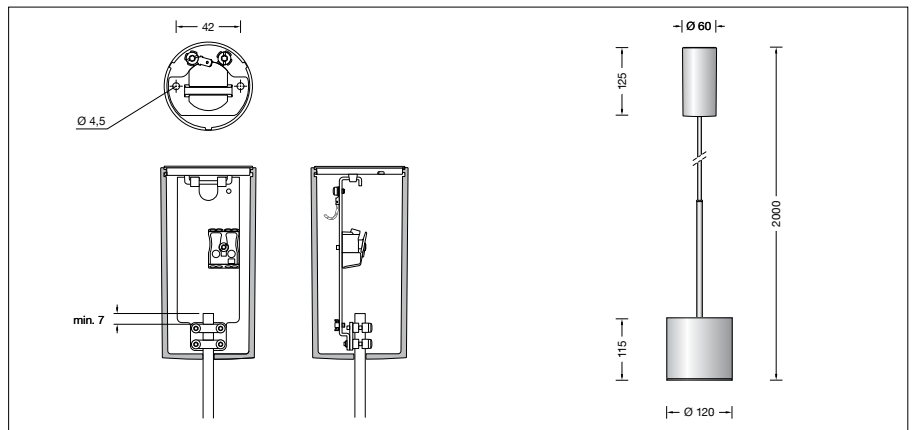
50 747.4 K3

Module designation	LED-0800/930
Colour temperature	3000 K
Colour rendering index	CRI > 90
Module luminous flux	1255 lm
Luminaire luminous flux	861 lm
Luminaire luminous efficiency	87,9 lm/W

Service life of the LED

Ambient temperature $t_a = 25^{\circ}\text{C}$
– at 400,000h: L70 B50

max. ambient temperature $t_a = 35^{\circ}\text{C}$
– at 350,000h: L70 B50

**Lighting technology**

Half beam angle 40°
Luminaire data for the light planning program
DIALux for outdoor lighting, street lighting and
indoor lighting, as well as luminaire data in
EULUMDAT and IES format are available on the
BEGA website at www.bega.com.

Article No. 50 747.4

Interior colour options

- matt aluminium
- matt brass
- matt copper

Code number **.2**Code number **.4**Code number **.6**