


## PIREQ 68 INTEGRATED

square, brushed aluminium, 6.5W, 38°, 3000K

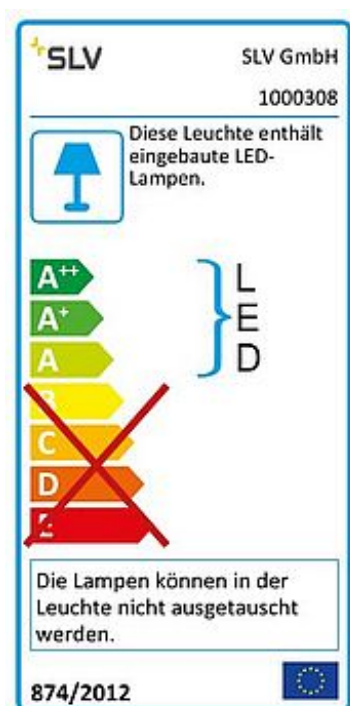

Article number	1000308
Feed-in capability	No
Lamp included	No
Installation diameter	6.8 cm
Installation depth	5.7 cm
Length	8.2 cm
Width	8.2 cm
Height	6 cm
Net weight	0.183 kg
Gross weight	0.247 kg
Voltage	220-240V ~50/60Hz
Protection class	II
IP-rating	IP 23
Beam angle	38 Degree
Average lifespan	30000 Hours
Colour temperature	3000 Kelvin
Colour rendering index	80
Luminous flux	580 lm
Energy efficiency class	A++
Way of mounting	Recessed mounted / Ceiling recessed
Colour	brushed aluminium
Form	square
Light distribution type 1	direct
Light distribution type 2	rotational symmetric
Material	Aluminium

The simplicity and effectiveness of the innovative PIREQ 68 INTEGRATED is captivating. It is available in matt black, white, or brushed aluminium, and in round or square form, single-headed. Equipped with a powerful, warm white premium COB LED in a tilting mount and the connection box included in the scope of supply, the downlight can be used in any lighting situation. The electrical connection is made directly to the 230V mains supply.

#### Notes

---

---

---