


AUSTRATURN downlight

round, chrome, MR16, max. 50W

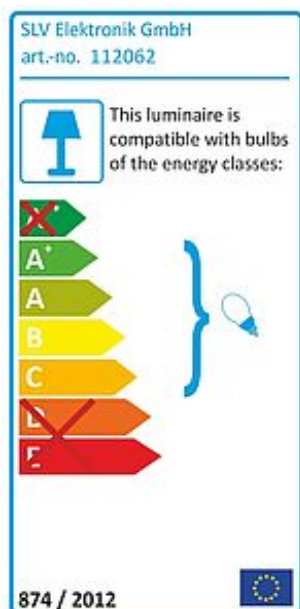

Article number	112062
Type of lamp	Conventional lamp
Lamp	MR16 12V max. 50W
Lampholder / Socket	GU5,3
Number of light sources	1
Lamp included	No
Installation diameter	9 cm
Installation depth	10 cm
Tilt range	40 Degree
Rotation range	350 Degree
Diameter	10.2 cm
Net weight	0.211 kg
Gross weight	0.299 kg
Voltage	12 Volt
Max. wattage	50 Watt
Protection class	III
Material	aluminium
Colour	chrome
Way of mounting	recessed ceiling mounting
Remark 1	Not suitable for the use of cool-beam lamps
Remark 2	Energy labels in your language are available in the Service Area sub point Download
Suitable for lamps from EEC	C
Suitable for lamps up to EEC	A+
Light distribution type 1	direct
Light distribution type 3	rotationally symmetric

The adjustable AUSTRATURN low-voltage downlight is available in white, chrome, satin nickel, titanium and silvergrey finish and allows independent adjustment of the desired beam angle of light thanks to the generously chosen pivoting range. To operate the downlight a matching transformer with 12V alternating current is required. This luminaire is compatible with bulbs of the energy classes: C - A+