
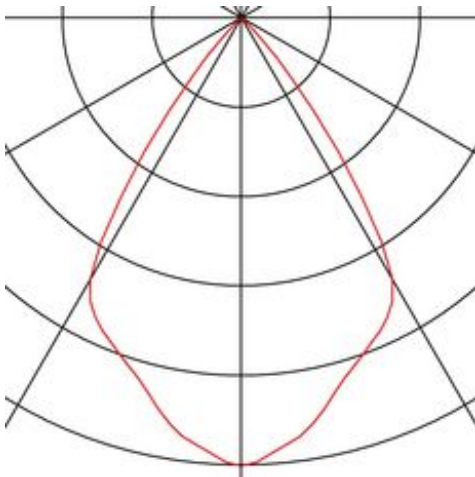


SUPROS

recessed fitting, LED, 3000K, round, tiltable, black, 4000lm, 60° reflector, 33.5W

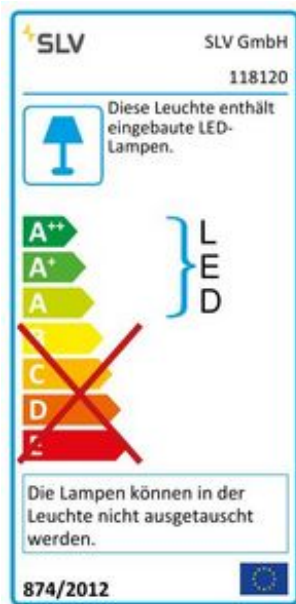

Article number	118120
Max. wattage	33.5 Watt
Light distribution type 1	Direct
Light distribution type 3	rotationally symmetric
Product family	Supros 4000
Feed-in capability	No
Lamp included	No
Installation diameter	18 cm
Installation depth	11.5 cm
Height	17 cm
Diameter	19.5 cm
Net weight	1.561 kg
Gross weight	1.745 kg
Voltage	220-240 ~50/60 . 950 Volts
Protection class	II
Beam angle	60 Degree
Material	Aluminium/glass
Colour	black
Way of mounting	Ceiling installation
Average lifespan	50000 Hours
Colour temperature	3000 Kelvin
Colour rendering index	80
Luminous flux	3150 lm
Energy efficiency class	A++
fastCalcEnabled	Yes
ranking	300
Catalogue page	BIG WHITE 2017: 519

The SUPROS light series impresses with its multitude of possible applications, excellent LED technology and its harmonious design. With its very high luminous flux, the SUPROS product family is ideally suited to replace power-hungry, conventional lighting installations. The wide-area reflector included in the delivers can be replaced by reflectors with narrower beam angles which are optionally available. This can be done without the need for tools. With the factory-installed LED driver, all the luminaires in the series are suitable for direct connection to the 230V mains supply.