


IP FLEXLED ROLL 24V

25W, white, 5m, 60 LED/m, IP55

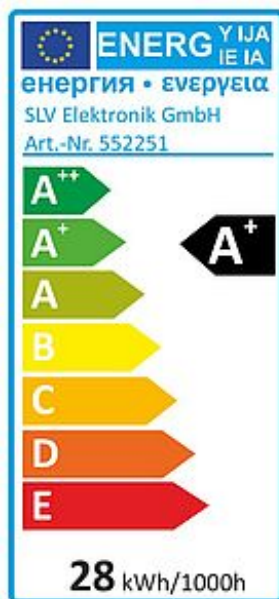

| | |
|-----------------------------|---|
| Article number | 552251 |
| LED per meter | 60 Meter |
| LED distance | 1.7 Meter |
| Type of lamp | LED lamp |
| Lamp | SMD LED |
| Number of light sources | 300 |
| Lamp included | Yes |
| Length | 500 cm |
| Width | 1.3 cm |
| Height | 0.5 cm |
| Net weight | 0.357 kg |
| Gross weight | 0.329 kg |
| Voltage | 24 Volt |
| Max. wattage | 25 Watt |
| Protection class | III |
| Beam angle | 120 Degree |
| Material | plastic |
| Way of mounting | surface wall mounting / surface floor mounting / surface ceiling mounting |
| Remark 1 | Strip embedded in plastic cover. Not extenable |
| Remark 2 | Seperable every 10 cm. From a length of 500 cm a new feed-in must be made |
| Remark 3 | Rear side equipped with adhesive tape |
| remark5 | From a length of 500 cm a new feed-in must be made |
| Average lifespan | 20000 Hours |
| Colour temperature | 5700 Kelvin |
| Luminous flux | 370 lm |
| Energy class lamp | A+ |
| Weighted energy consumption | 28 kWh/1000h |

Plastic coated flexible 24V DC LED strip for outdoor usage. For simplified mounting the backside is covered with adhesive tape. The power input is given by a 24V PSU via a 50 cm connection lead. The strip is rated IP55 and thus also suitable for outdoor use. The product is rated EEC A+. The weighted energy consumption is 28kWh/1000h.