


Pivoting-head luminaire ABLL 1




112353000-00041201

Waldmann **W**

ENGINEERS OF LIGHT



CE UK CA

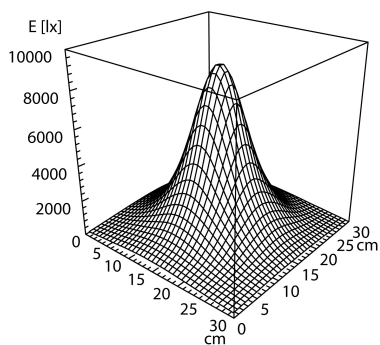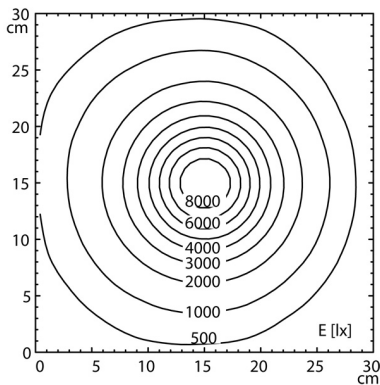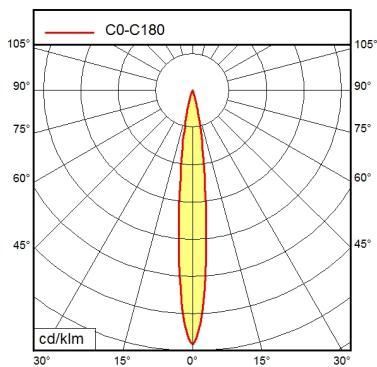

Light source	LED
Work equipment	Without
Connected load	Depending on the ballast; DC
Power consumption	ca. 3 W
Luminous flux	approx. 180 lm
Light type/-color	Daylight
Colour temperatur	approx. 6.500 K
Color rendering index	CRI ≥ 75
Light distribution	Narrow-beam; Direct
Beam angle	6°
Glare control	Without
System of protection	IP 67
Class of protection	III
Technology	-
Operation	External
Housing	Aluminium; Anodised; Jet black
Light source cover	Borosilicate
Weight (net)	ca. 0,2 kg
Mains lead	ca. 1,5 m; With free stranded wires
Fastening	Threaded hole 1,5xM18
Minimum ambient temperature	25 °C
Maximum ambient temperature	25 °C
Special features	Pivoting through ball joint; Spot