
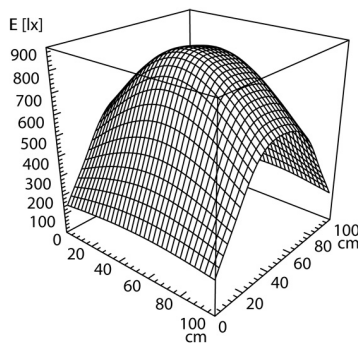
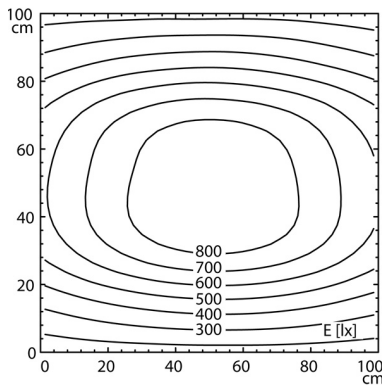
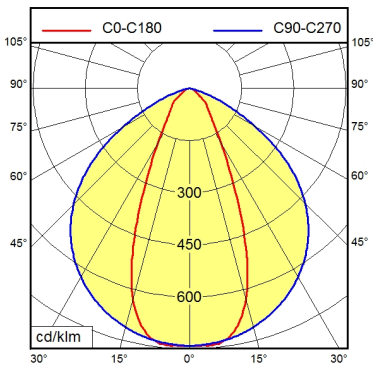


Surface-mounted luminaire MACH LED PRO MUAL 3 S

112571030-00082788

Waldmann **W**

ENGINEERS OF LIGHT

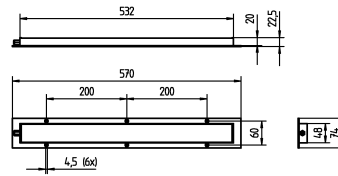

Light source	LED
Work equipment	Without
Connected load	20 - 28 V; DC
Power consumption	ca. 18 W
Luminous flux	approx. 1.230 lm
Light type/-color	Cold white
Colour temperatur	approx. 5.000 K
Color rendering index	CRI ≥ 80
Light distribution	Direct; Symmetric
Beam angle	30°
Glare control	Without
System of protection	IP 67
Class of protection	III
Technology	Switchable; -
Operation	External
Housing	Aluminium; Anodised; Silver metallic
Light source cover	Borosilicate; Clear
Weight (net)	ca. 1 kg
Mains lead	ca. 3 m; With free stranded wires
Design	mounted version
Fastening	Screws
Maximum ambient temperature	40 °C
Special features	Mounted version