
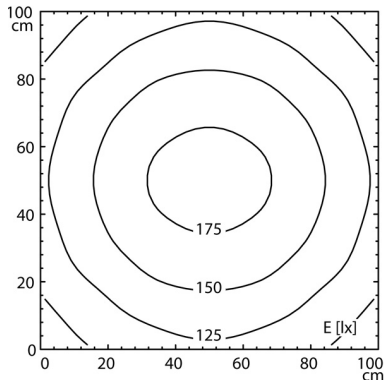


QUICKON 3

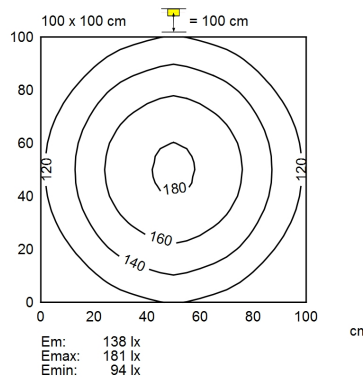

Light source	LED
Work equipment	Without
Connected load	16 - 32 V; DC
Power consumption	ca. 4,5 W
Luminous flux	approx. 590 lm
Light type/-color	Daylight
Colour temperatur	approx. 5.400 K
Color rendering index	CRI ≥ 80
Light distribution	Direct
Direct ratio	approx. 93 %
Beam angle	120°
Chromaticity tolerance LED	< 5 SDCM
Glare control	Without
Luminance (L65)	≤ 8.000 cd/m ²
Unified glare rating (4H 8H)	≤ 25
System of protection	IP 67
Class of protection	III
Technology	Switchable; -
Operation	External
Housing	Polycarbonate (PC), clear
Light source cover	Polycarbonate (PC)
Weight (net)	ca. 0,4 kg
Mains lead	Built-in plug; QUICKON 3
Fastening	Lamp bracket (accessory)
Dimension	A=368 mm
Light output	D=307 mm
Side part	D with plug
Minimum ambient temperature	-25 °C
Maximum ambient temperature	40 °C
Special features	Through-wired