


Serie_763

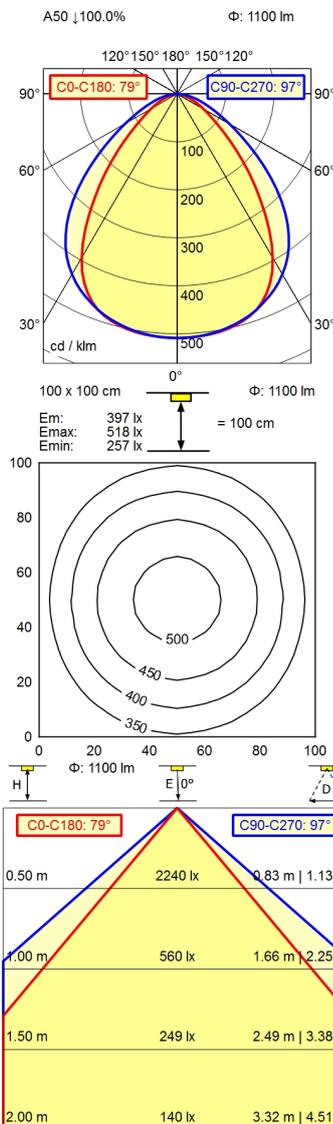

| | |
|-------------------------------------|--|
| Light source | LED |
| Work equipment | Without |
| Connected load | 18 - 30 V; DC |
| Power consumption | ca. 12 W |
| Luminous flux | approx. 1.100 lm |
| Luminous efficiency | approx. 91 lm/W |
| Light type/-color | Cold white |
| Colour temperatur | approx. 5.000 K |
| Color rendering index | CRI ≥ 80 |
| Light distribution | Direct; Symmetric |
| Beam angle | 80°/100° |
| Chromaticity tolerance LED | < 4 SDCM |
| Luminance (L65) | ≤ 27.000 cd/m ² |
| Unified glare rating (4H 8H) | ≤ 25 |
| System of protection | IP 67 |
| Class of protection | III |
| Technology | Switchable; - |
| Operation | External |
| Housing | Aluminium; Anodised; Aluminium coloured anodised Borosilicate; Clear |
| Light source cover | |
| Weight (net) | ca. 1,5 kg |
| Mains lead | Built-in plug; Connection box; Serie_763 |
| Design | mounted version |
| Fastening | L-angle; Clamp |
| Dimension | A=370 mm |
| Minimum ambient temperature | -10 °C |
| Maximum ambient temperature | 50 °C |
| Special features | Power equipment; Through-wired |