



Surface-mounted luminaire MACH LED PLUS.seventy


113055000-00580594




Serie_763

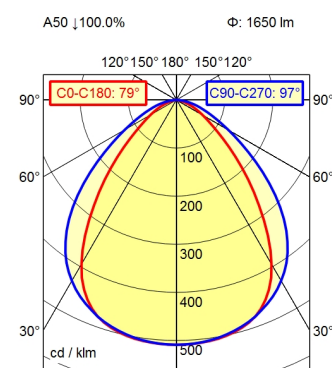

100 x 100 cm Φ : 1650 lm
Em: 589 lx
Emax: 765 lx
Emin: 384 lx

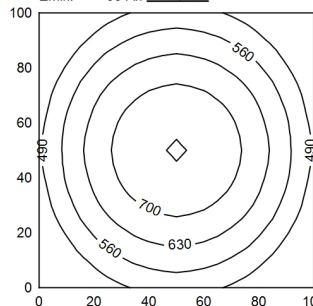

Φ : 1650 lm E | 0°

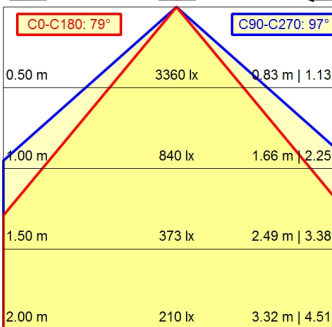

light source
work equipment
connected load
power consumption
luminous flux
luminous efficiency
light type/-color
colour temperatur
color rendering index
light distribution
beam angle
chromaticity tolerance LED
luminance (L65)
unified glare rating (4H 8H)
class of protection
technology
operation
housing
cover
weight (net)
mains lead
design
fastening
dimension
minimum ambient temperature
maximum ambient temperature
special features

LED
without
18 - 30 V; direct current (DC)
ca. 18 W
approx. 1.650 lm
approx. 91 lm/W
cold white
approx. 5.000 K
CRI \geq 80
direct; symmetric
80°/100°
< 4 SDCM
 \leq 27000 cd/m²
004
III
switchable; no notice
external
aluminium; anodised; aluminium coloured
anodised
borosilicate; clear
ca. 1,7 kg
built-in plug; Serie_763
mounted version
L-angle; clamp
A=510 mm
-10 °C
45 °C
Power equipment