



# Surface-mounted luminaire MACH LED PLUS.seventy


113063000-00580618




Serie\_763

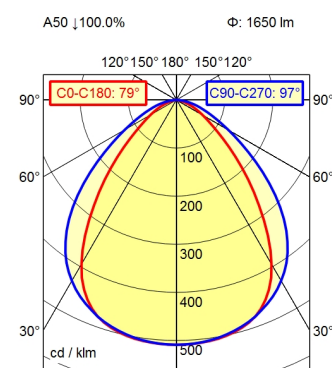

100 x 100 cm Φ: 1650 lm  
Em: 589 lx  
Emax: 765 lx  
Emin: 384 lx  
= 100 cm

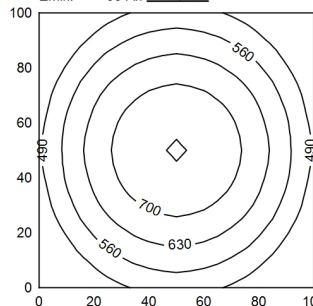

Φ: 1650 lm E 0°

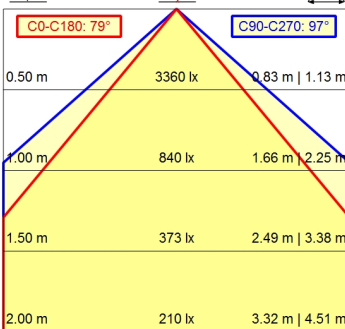

light source  
work equipment  
connected load  
power consumption  
luminous flux  
luminous efficiency  
light type/-color  
colour temperatur  
color rendering index  
light distribution  
beam angle  
chromaticity tolerance LED  
luminance (L65)  
class of protection  
technology  
operation  
housing  
cover  
weight (net)  
mains lead  
design  
fastening  
dimension  
minimum ambient temperature  
maximum ambient temperature  
special features

LED  
without  
18 - 30 V; direct current (DC)  
ca. 18 W  
approx. 1.650 lm  
approx. 91 lm/W  
cold white  
approx. 5.000 K  
CRI ≥ 80  
direct; symmetric  
80°/100°  
< 4 SDCM  
≤ 27000 cd/m<sup>2</sup>  
III  
switchable; no notice  
external  
aluminium; anodised; aluminium coloured  
anodised  
borosilicate; clear  
ca. 1,9 kg  
built-in plug; Serie\_763  
mounted version  
L-angle; clamp  
A=565 mm  
-10 °C  
45 °C  
Power equipment