



Surface-mounted luminaire MACH LED PLUS.seventy

113082000-00580681




Serie_763

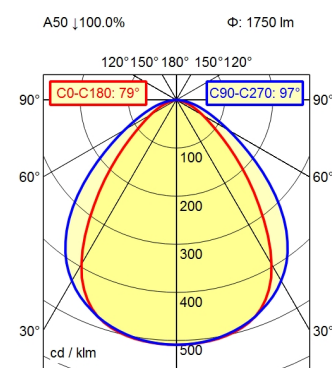


100 x 100 cm Φ : 1750 lm

Em: 579 lx
Emax: 729 lx
Emin: 394 lx

= 100 cm



Φ : 1750 lm E | 0°



Light source	LED
Work equipment	Without
Connected load	18 - 30 V; DC
Power consumption	ca. 18 W
Luminous flux	approx. 1.750 lm
Luminous efficiency	approx. 97 lm/W
Light type/-color	Cold white
Colour temperatur	approx. 5.000 K
Color rendering index	CRI \geq 80
Light distribution	Direct; Symmetric
Beam angle	80°/100°
Chromaticity tolerance LED	< 4 SDCM
Luminance (L65)	\leq 13.000 cd/m ²
Unified glare rating (4H 8H)	\leq 22
System of protection	IP 67
Class of protection	III
Technology	Switchable; -
Operation	External
Housing	Aluminium; Anodised; Aluminium coloured anodised Borosilicate; Clear
Light source cover	
Weight (net)	ca. 3,9 kg
Mains lead	Built-in plug; Connection box; Serie_763
Design	mounted version
Fastening	L-angle; Clamp
Dimension	A=1070 mm
Minimum ambient temperature	-10 °C
Maximum ambient temperature	60 °C
Special features	Eco equipment; Through-wired