



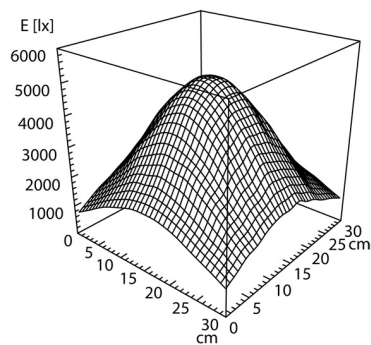

CEE 7/XVI

BS 1363

NEMA 1-15P

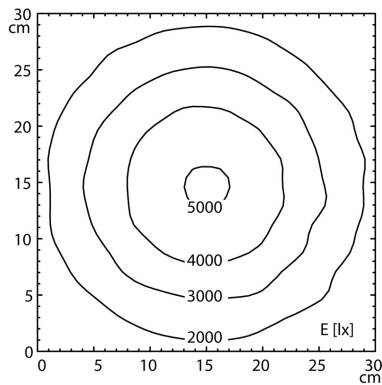

light source	LED
work equipment	electronic plug-in transformer
connected load	100 - 240 V; alternating current (AC); 50 Hz; 60 Hz
power consumption	ca. 6 W
luminous flux	approx. 420 lm
luminous efficiency	approx. 70 lm/W
light type/-color	cold white
colour temperatur	approx. 4.000 K
color rendering index	CRI ≥ 90; R9 ≥ 50
light distribution	direct
direct ratio	approx. 100 %
chromaticity tolerance LED	< 3 SDCM
class of protection	II
technology	continuously dimmable; Touch DIM
operation	Touch-LED
housing	aluminium/plastic; anodised; black
cover	Acrylic (PMMA); satine
arm	aluminium coloured anodised
weight (net)	ca. 1,5 kg
mains lead	ca. 2,3 m; mains plug; CEE 7/XVI; BS 1363; NEMA 1-15P
fastening	table clamp (accessory); wall bracket (accessory); screw-down flange; magnetic base (accessory)
lens, dimensions	Ø 72 mm
lens, diopters	6
add-on lens	not available