

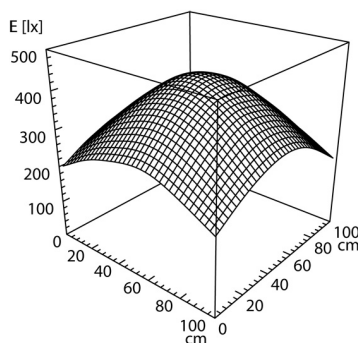


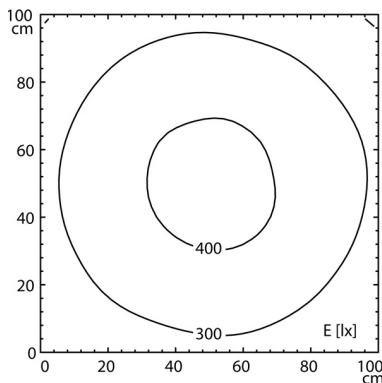

RSFPM 5/0.5 M

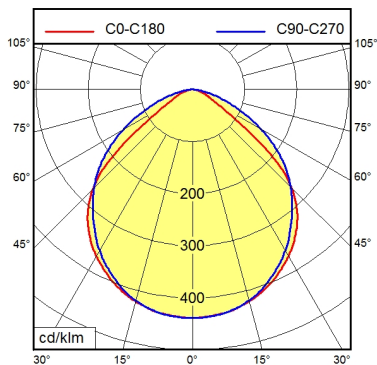

<b>Light source</b>	LED
<b>Work equipment</b>	Without
<b>Connected load</b>	20 - 28 V; DC
<b>Power consumption</b>	ca. 10,5 W
<b>Luminous flux</b>	approx. 1.020 lm
<b>Luminous efficiency</b>	approx. 92 lm/W
<b>Light type/-color</b>	Cold white
<b>Colour temperatur</b>	approx. 5.000 K
<b>Color rendering index</b>	CRI ≥ 80
<b>Light distribution</b>	Direct; Symmetric
<b>Glare control</b>	Without
<b>System of protection</b>	IP 67
<b>Class of protection</b>	III
<b>Technology</b>	Switchable; -
<b>Operation</b>	External
<b>Housing</b>	Aluminium; Untreated; Aluminium coloured anodised
<b>Light source cover</b>	Polycarbonate (PC); Clear
<b>Weight (net)</b>	ca. 1 kg
<b>Mains lead</b>	Built-in plug; RSFPM 5/0.5 M
<b>Design</b>	Integrated version
<b>Fastening</b>	Screws
<b>Dimension</b>	390 mm
<b>Installation dimensions</b>	ca. 361 mm; 51 mm; 21 mm
<b>Maximum ambient temperature</b>	60 °C