
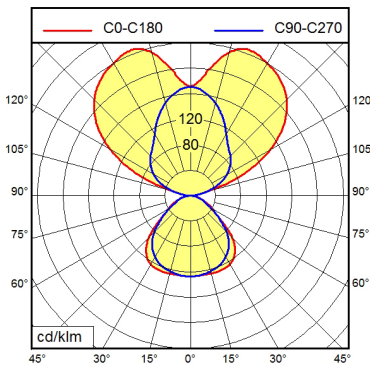




# Suspended luminaire IDOO.pendant IPP 7000/840/D

113263000-00688760

# Waldmann **W**

ENGINEERS OF LIGHT



**Light source**

**Work equipment**

**Connected load**

**Power consumption**

**Standby**

**Power factor**

**Luminous flux**

**Luminous efficiency**

**Light type/-color**

**Colour temperatur**

**Color rendering index**

**Light distribution**

**Direct ratio**

**Chromaticity tolerance LED**

**Glare control**

**Luminance (L65)**

**Unified glare rating (4H 8H)**

**System of protection**

**Technology**

**Operation**

**Housing**

**Light source cover**

**Weight (net)**

**Mains lead**

**Fastening**

**Configuration**

**Special features**

LED

Electronic ballast

220 - 240 V; 50 Hz; 60 Hz

ca. 49 W

ca. 0,3 W

env. 0,950

approx. 7.000 lm

approx. 142 lm/W

Cold white

approx. 4.000 K

CRI ≥ 80

Direct/indirect

approx. 34 %

< 3 SDCM

Conical prismatic screen

≤ 2.500 cd/m<sup>2</sup>

≤ 16

IP 20

Continuously dimmable

External

White

Acrylic (PMMA); Clear

ca. 7,5 kg

ca. 1 m; With free stranded wires

Steel cable 0.3 - 0.7 m

Single Luminaire

Indirect light component with Batwing diffuser for wide-beam light exit; Direct light component with edge light and light-guide technology for homogenous light exit; DALI Load 1x; Integration into DALI light management systems; DALI - dimming via digital rotary dimmer; TouchDIM - dimming via standard switch