
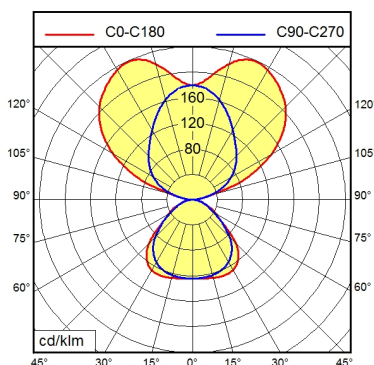


Suspended luminaire IDOO.pendant IPP 7000/VTL/D

113268000-00688793

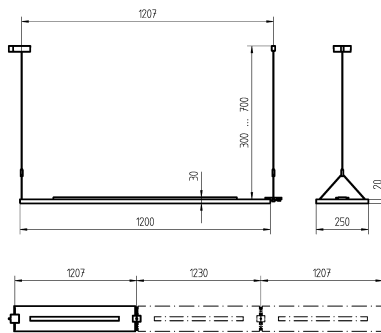

Light source	LED
Work equipment	Electronic ballast
Connected load	220 - 240 V; 50 Hz; 60 Hz
Power consumption	ca. 65 W
Standby	ca. 0,5 W
Power factor	env. 0,980
Luminous flux	approx. 8.400 lm
Luminous efficiency	approx. 129 lm/W
Light type/-color	Cold white
Colour temperatur	approx. 2.700 - 6.500 K
Color rendering index	CRI ≥ 80
Light distribution	Direct/indirect
Direct ratio	approx. 33 %
Chromaticity tolerance LED	< 3 SDCM
Glare control	Conical prismatic screen
Luminance (L65)	≤ 2.800 cd/m ²
System of protection	IP 20
Technology	Continuously dimmable
Operation	External
Housing	White
Light source cover	Acrylic (PMMA); Clear
Weight (net)	ca. 8 kg
Mains lead	ca. 1 m; With free stranded wires
Fastening	Steel cable 0.3 - 0.7 m
Configuration	Start luminaire
Special features	Easy-to-install mechanical and electrical connection of further luminaires; Start luminaire with mains connection; Through-wiring, maximum 6 luminaires at one mains connection; Indirect light component with Batwing diffuser for wide-beam light exit; Direct light component with edge light and light-guide technology for homogenous light exit; LED system: DALI Load 1 (2700 K, 49 W, 6100 lm) , DALI Load 2 (6500 K, 49 W, 6500 lm); Specified values when used with NET module