
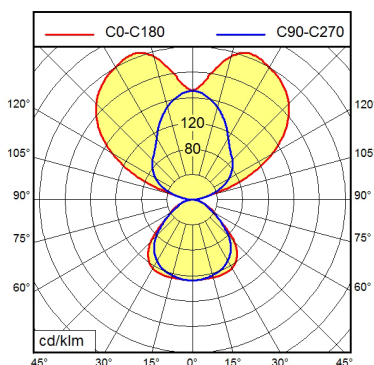


# Suspended luminaire IDOO.pendant IPP 7000/840/D

113269000-00688820

# Waldmann **W**

ENGINEERS OF LIGHT

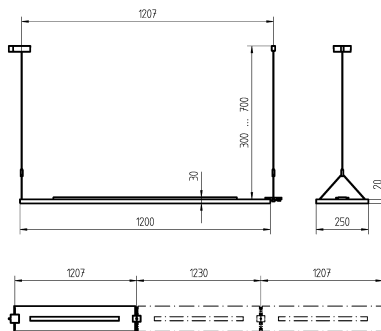

<b>Light source</b>	LED
<b>Work equipment</b>	Electronic ballast
<b>Connected load</b>	220 - 240 V; 50 Hz; 60 Hz
<b>Power consumption</b>	ca. 49 W
<b>Standby</b>	ca. 0,3 W
<b>Power factor</b>	env. 0,950
<b>Luminous flux</b>	approx. 7.000 lm
<b>Luminous efficiency</b>	approx. 142 lm/W
<b>Light type/-color</b>	Cold white
<b>Colour temperatur</b>	approx. 4.000 K
<b>Color rendering index</b>	CRI ≥ 80
<b>Light distribution</b>	Direct/indirect
<b>Direct ratio</b>	approx. 34 %
<b>Chromaticity tolerance LED</b>	< 3 SDCM
<b>Glare control</b>	Conical prismatic screen
<b>Luminance (L65)</b>	≤ 2.500 cd/m <sup>2</sup>
<b>Unified glare rating (4H 8H)</b>	≤ 16
<b>System of protection</b>	IP 20
<b>Technology</b>	Continuously dimmable
<b>Operation</b>	External
<b>Housing</b>	Silver
<b>Light source cover</b>	Acrylic (PMMA); Clear
<b>Weight (net)</b>	ca. 7,7 kg
<b>Mains lead</b>	ca. 1 m; With free stranded wires
<b>Fastening</b>	Steel cable 0.3 - 0.7 m
<b>Configuration</b>	Start luminaire
<b>Special features</b>	Easy-to-install mechanical and electrical connection of further luminaires; Start luminaire with mains connection; Through-wiring, maximum 6 luminaires at one mains connection; Indirect light component with Batwing diffuser for wide-beam light exit; Direct light component with edge light and light-guide technology for homogenous light exit; DALI Load 1x; Integration into DALI light management systems; DALI - dimming via digital rotary dimmer; TouchDIM - dimming via standard switch