
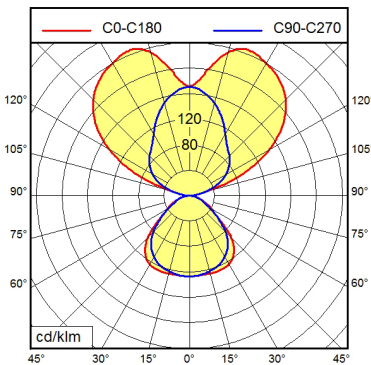


Suspended luminaire IDOO.pendant IPP 7000/840/D

113277000-00688851

Waldmann **W**

ENGINEERS OF LIGHT

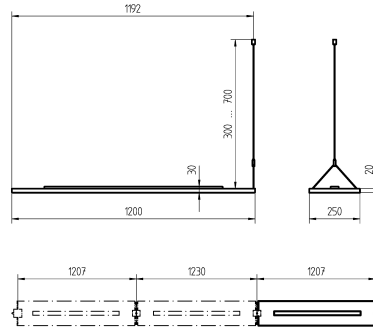

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Direct ratio

Chromaticity tolerance LED

Glare control

Luminance (L65)

Unified glare rating (4H 8H)

System of protection

Technology

Operation

Housing

Light source cover

Weight (net)

Mains lead

Fastening

Configuration

Special features

LED

Electronic ballast

220 - 240 V; 50 Hz; 60 Hz

ca. 49 W

ca. 0,3 W

env. 0,950

approx. 7.000 lm

approx. 142 lm/W

Cold white

approx. 4.000 K

CRI ≥ 80

Direct/indirect

approx. 34 %

< 3 SDCM

Conical prismatic screen

≤ 2.500 cd/m²

≤ 16

IP 20

Continuously dimmable

External

Silver

Acrylic (PMMA); Clear

ca. 7,2 kg

Connector

Steel cable 0.3 - 0.7 m

End luminaire

Easy-to-install mechanical and electrical connection of further luminaires; End luminaire; Indirect light component with Batwing diffuser for wide-beam light exit; Direct light component with edge light and light-guide technology for homogenous light exit; Control via start luminaire; Maximum 6 luminaires on one mains connection; DALI Load 1x