
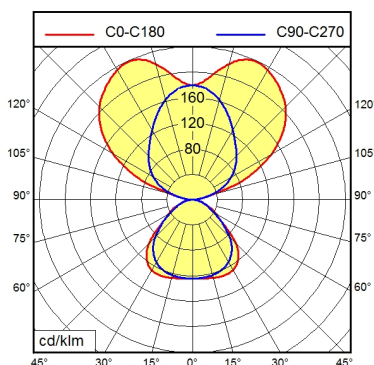
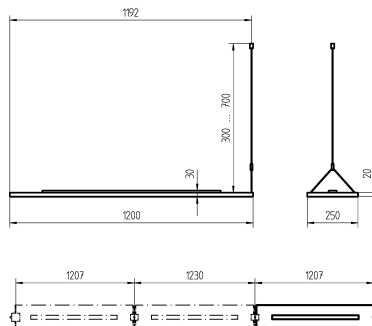


# Suspended luminaire IDOO.pendant IPP 7000/VTL/D

113278000-00688854



<b>Light source</b>	LED
<b>Work equipment</b>	Electronic ballast
<b>Connected load</b>	220 - 240 V; 50 Hz; 60 Hz
<b>Power consumption</b>	ca. 65 W
<b>Standby</b>	ca. 0,5 W
<b>Power factor</b>	env. 0,980
<b>Luminous flux</b>	approx. 8.400 lm
<b>Luminous efficiency</b>	approx. 129 lm/W
<b>Light type/-color</b>	Cold white
<b>Colour temperatur</b>	approx. 2.700 - 6.500 K
<b>Color rendering index</b>	CRI ≥ 80
<b>Light distribution</b>	Direct/indirect
<b>Direct ratio</b>	approx. 33 %
<b>Chromaticity tolerance LED</b>	< 3 SDCM
<b>Glare control</b>	Conical prismatic screen
<b>Luminance (L65)</b>	≤ 2.800 cd/m <sup>2</sup>
<b>Unified glare rating (4H 8H)</b>	≤ 16
<b>System of protection</b>	IP 20
<b>Technology</b>	Continuously dimmable
<b>Operation</b>	External
<b>Housing</b>	Silver
<b>Light source cover</b>	Acrylic (PMMA); Clear
<b>Weight (net)</b>	ca. 7,5 kg
<b>Mains lead</b>	Connector
<b>Fastening</b>	Steel cable 0.3 - 0.7 m
<b>Configuration</b>	End luminaire
<b>Special features</b>	Easy-to-install mechanical and electrical connection of further luminaires; End luminaire; Indirect light component with Batwing diffuser for wide-beam light exit; Direct light component with edge light and light-guide technology for homogenous light exit; Control via start luminaire; Luminaire for biodynamic light VTL; Maximum 6 luminaires on one mains connection; LED system: DALI Load 1 (2700 K, 49 W, 6100 lm) , DALI Load 2 (6500 K, 49 W, 6500 lm); Specified values when used with NET module