
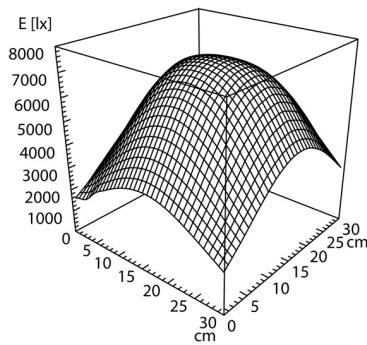


CEE 7/XVI

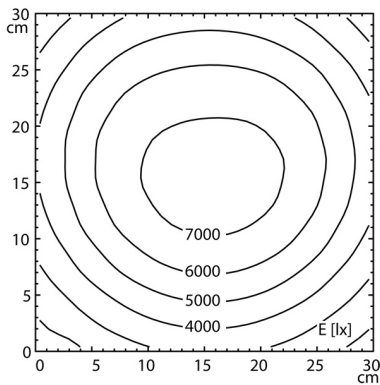

light source	LED
work equipment	electronic plug-in ballast
connected load	100 - 240 V; alternating current (AC); 50 Hz; 60 Hz
power consumption	ca. 11 W
sec. power consumption	ca. 9,5 W
luminous flux	approx. 800 lm
luminous efficiency	approx. 72 lm/W
light type/-color	cold white
colour temperatur	approx. 5.000 K
color rendering index	CRI ≥ 80
light distribution	direct
direct ratio	approx. 100 %
chromaticity tolerance LED	< 3 SDCM
class of protection	II with plug-in power supply, III without plug-in power supply
technology	continuously dimmable; Touch DIM
operation	multi-function switch
housing	plastic; untreated; dusty grey
cover	Polycarbonate (PC)
arm	tubular aluminium section; anodized; aluminium coloured anodised
balance of articulation joints	spring
weight (net)	ca. 2,5 kg
mains lead	ca. 3,2 m; mains plug; CEE 7/XVI
fastening	tap16
lens, dimensions	Ø 160 mm
lens material	PMMA
lens, diopters	3,5