


RST 25i3 Einbau

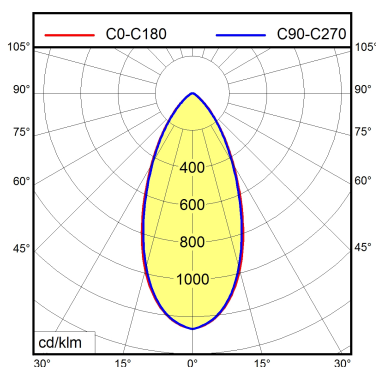

| | |
|---------------------------------------|-------------------------------------------|
| Light source | LED |
| Work equipment | Electronic ballast |
| Connected load | 220 - 240 V; AC; 50 Hz; 60 Hz |
| Power consumption | ca. 90 W |
| Power factor | env. 0,950 |
| Luminous flux | approx. 15.000 lm |
| Luminous efficiency | approx. 166 lm/W |
| Light type/-color | Cold white |
| Colour temperatur | approx. 4.000 K |
| Color rendering index | CRI ≥ 80 |
| Light distribution | Narrow-beam; Direct; Symmetric |
| Direct ratio | approx. 100 % |
| Beam angle | 48° |
| Chromaticity tolerance LED | < 3 SDCM |
| Glare control | Faceted optic |
| Luminance (L65) | ≤ 4.200 cd/m ² |
| Unified glare rating (4H 8H) | ≤ 19 |
| System of protection | IP 65 |
| Class of protection | I |
| Technology | Switchable; DC control signal |
| Operation | External |
| Housing | Aluminium; Powder coatet; White aluminium |
| Light source cover | Acrylic (PMMA); Clear |
| Weight (net) | ca. 8,2 kg |
| Mains lead | Built-in plug; RST 25i3 Einbau |
| Design | mounted version |
| Fastening | Available separately |
| Accessory | Junction box (RST 2013) |
| Minimum ambient temperature | -30 °C |
| Maximum ambient temperature | 50 °C |
| Decorative contrast side parts | Jet black |
| Life expectancy LED | L80B50 60.000h |