



CE

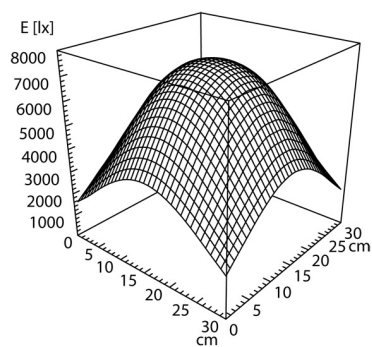

CEE 7/VII

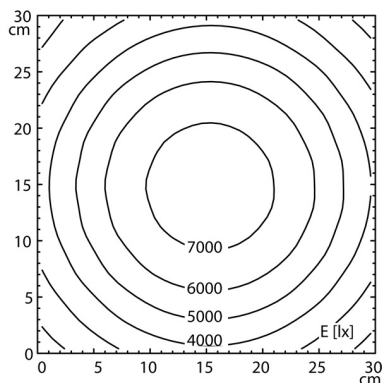

Light source	LED
Work equipment	Electronic transformer
Connected load	100 - 240 V; AC; 50 Hz; 60 Hz
Secondary tension	24 V
Power consumption	ca. 16 W
Sec. power consumption	ca. 14 W
Light type/-color	Cold white
Colour temperatur	approx. 4.000 K
Color rendering index	CRI ≥ 90; R9 ≥ 50
Light distribution	Direct
Direct ratio	approx. 100 %
System of protection	IP 20
Class of protection	I with plug-in power supply; III without plug-in power supply
Technology	Multi-stage switchable; Continuously dimmable; Touch DIM
Operation	Multi-function switch
Housing	Plastic; ESD-version; Black
Light source cover	Polyamide; Milky
Arm	Tubular aluminium section; ESD-coat of lacquer; Black
Balance of articulation joints	Spring
Weight (net)	ca. 2,5 kg
Mains lead	ca. 3,3 m; Mains plug; CEE 7/VII
Fastening	Screw-down flange
Lens, dimensions	Ø 160 mm
Lens material	Glass
Lens, diopters	3,5
Special features	Ra (luminaire) ca. 90; ESD version; Long arms; Light characteristic can be adjusted with a 3-way switch