



RSFM 4/0,05 P25-1

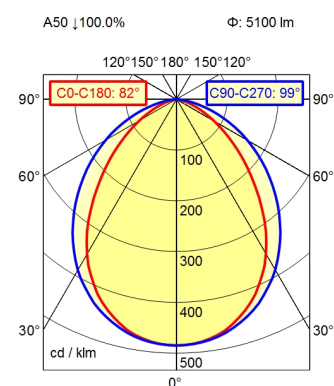

Em: 1404 lx  
E<sub>max</sub>: 1753 lx  
E<sub>min</sub>: 984 lx



H | E | D

0.50 m	9892 lx	0.87 m   1.17 m
1.00 m	2473 lx	1.74 m   2.34 m
1.50 m	1099 lx	2.61 m   3.52 m
2.00 m	618 lx	3.48 m   4.69 m

<b>Light source</b>	LED
<b>Work equipment</b>	Without
<b>Connected load</b>	20 - 28 V; DC
<b>Power consumption</b>	ca. 50 W
<b>Luminous flux</b>	approx. 5.100 lm
<b>Luminous efficiency</b>	approx. 102 lm/W
<b>Light type/-color</b>	Cold white
<b>Colour temperatur</b>	approx. 5.000 K
<b>Color rendering index</b>	CRI ≥ 80
<b>Light distribution</b>	Wide beam; Direct; Symmetric
<b>Beam angle</b>	90°
<b>Chromaticity tolerance LED</b>	< 4 SDCM
<b>Glare control</b>	Without
<b>Luminance (L65)</b>	≤ 50.000 cd/m <sup>2</sup>
<b>Unified glare rating (4H 8H)</b>	≤ 28
<b>System of protection</b>	IP 67
<b>Class of protection</b>	III
<b>Technology</b>	Switchable; -
<b>Operation</b>	External
<b>Housing</b>	Aluminium; Anodised; Aluminium coloured anodised Borosilicate; Clear
<b>Light source cover</b>	
<b>Weight (net)</b>	ca. 2,4 kg
<b>Mains lead</b>	Built-in plug; RSFM 4/0,05 P25-1
<b>Design</b>	mounted version
<b>Fastening</b>	L-angle; Clamp
<b>Dimension</b>	A=1540 mm
<b>Minimum ambient temperature</b>	0 °C
<b>Maximum ambient temperature</b>	50 °C
<b>Special features</b>	Through-wired

# Surface-mounted luminaire MACH LED PLUS.forty MLAL 126 SD

113693000-00800918

