
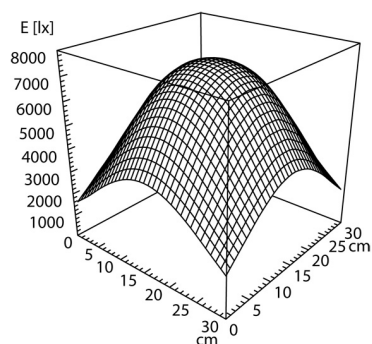


CE

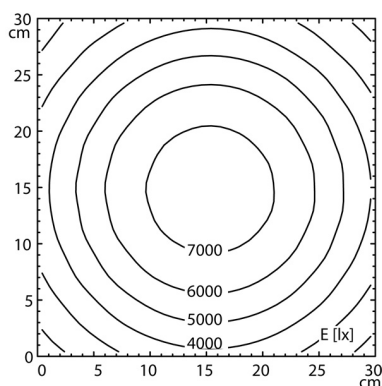

CEE 7/7II

**Light source****Work equipment****Connected load****Secondary tension****Power consumption****Sec. power consumption****Light type/-color****Colour temperatur****Color rendering index****Light distribution****Direct ratio****System of protection****Class of protection****Technology****Operation****Housing****Light source cover****Arm****Balance of articulation joints****Weight (net)****Mains lead****Fastening****Lens, dimensions****Lens material****Lens, diopters****Special features**

LED

Electronic transformer

100 - 240 V; AC; 50 Hz; 60 Hz

24 V

ca. 16 W

ca. 14 W

Cold white

approx. 4.000 K

CRI ≥ 90; R9 ≥ 50

Direct

approx. 100 %

IP 20

I with plug-in power supply; III without plug-in power supply
Multi-stage switchable; Continuously dimmable;
Touch DIM
Multi-function switch

Plastic; ESD-version; Black

Polyamide; Milky

Tubular aluminium section; ESD-coat of lacquer;
Black
Spring

ca. 2,6 kg

ca. 3,5 m; Mains plug; CEE 7/7II

Screw-down flange; Table clamp

Ø 160 mm

Glass

3,5

Ra (luminaire) ca. 90; ESD version; Light characteristic can be adjusted with a 3-way switch