


M12-A-5

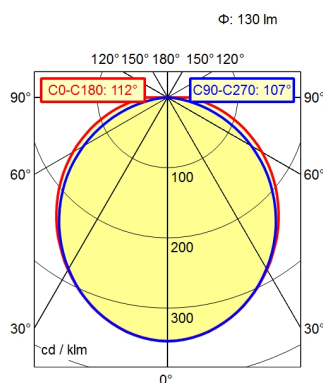

Light source	LED
Work equipment	Without
Connected load	22 - 26 V; DC
Power consumption	ca. 6 W
Luminous flux	approx. 130 lm
Luminous efficiency	approx. 21 lm/W
Light type/color	adjustable light colors; Red; Green; Blue; Yellow; Magenta; Cyan; White
Light distribution	Direct
Beam angle	112° / 107°
Glare control	Screen
System of protection	IP 54
Class of protection	III
Technology	Multi-stage switchable; -
Operation	External
Housing	Aluminium/plastic; Anodised, painted; Aluminium coloured anodised
Light source cover	Acrylic (PMMA); Satine
Weight (net)	ca. 0,2 kg
Mains lead	Built-in plug; M12-A-5
Design	mounted version
Fastening	Bracket
Dimension	A=335mm,Cmin=290mm,Cmax=320mm
Minimum ambient temperature	5 °C
Maximum ambient temperature	40 °C
Decorative contrast side parts	Natural silver anodised
Special features	7 colours controllable