


M12-A-5

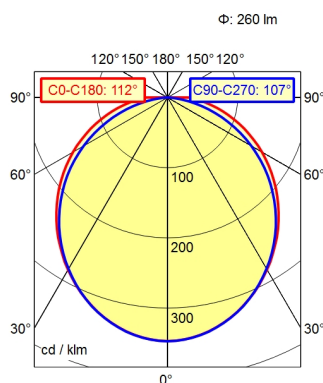

| | |
|---------------------------------------|---|
| Light source | LED |
| Work equipment | Without |
| Connected load | 22 - 26 V; DC |
| Power consumption | ca. 12 W |
| Luminous flux | approx. 260 lm |
| Luminous efficiency | approx. 21 lm/W |
| Light type/color | adjustable light colors; Red; Green; Blue; Yellow; Magenta; Cyan; White |
| Light distribution | Direct |
| Beam angle | 112° / 107° |
| Glare control | Screen |
| System of protection | IP 54 |
| Class of protection | III |
| Technology | Multi-stage switchable; - |
| Operation | External |
| Housing | Aluminium/plastic; Anodised, painted; Aluminium coloured anodised |
| Light source cover | Acrylic (PMMA); Satine |
| Weight (net) | ca. 0,3 kg |
| Mains lead | Built-in plug; M12-A-5 |
| Design | mounted version |
| Fastening | Bracket |
| Dimension | A=615mm,Cmin=570mm,Cmax=600mm |
| Minimum ambient temperature | 5 °C |
| Maximum ambient temperature | 40 °C |
| Decorative contrast side parts | Natural silver anodised |
| Special features | 7 colours controllable |