


Free-standing luminaire YARA.single YAS 10000/840/R/SW/CEE/00/C

114268000-00808310


Waldmann **W**

ENGINEERS OF LIGHT

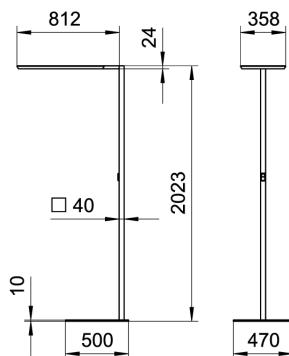

CEE 7/VII

D43 ↓ 13.0% ↑ 87.0%

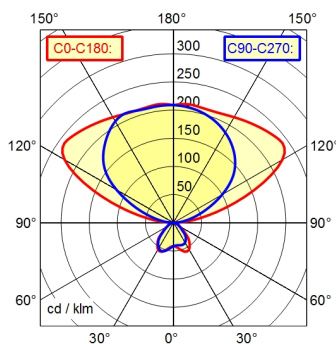

| | |
|-----------------------------------|---|
| Light source | LED |
| Work equipment | Electronic ballast DALI |
| Connected load | 220 - 240 V; AC; 50 Hz; 60 Hz |
| Power consumption | ca. 70 W; 107 W |
| Power factor | env. 0,966 |
| Luminous flux | approx. 10.000 lm |
| Luminous efficiency | approx. 142 lm/W |
| Light type/-color | Cold white |
| Colour temperatur | approx. 4.000 K |
| Color rendering index | CRI ≥ 80 |
| Light distribution | Direct/indirect |
| Direct ratio | approx. 13 % |
| Chromaticity tolerance LED | < 3 SDCM |
| Glare control | Conical prismatic screen |
| Luminance (L65) | ≤ 1.800 cd/m ² |
| System of protection | IP 20 |
| Class of protection | I |
| Technology | Presence and daylight sensor control (PIR); DALI; Touch DIM Wireless switch |
| Operation | |
| Housing | Aluminium/plastic; Powder coatet; Black |
| Light source cover | Acrylic (PMMA); Structured; Satine |
| Arm | Steel tube; Powder-coated; Tubular section upright; Black |
| Luminaire base | C-form flat |
| Weight (net) | ca. 18 kg |
| Mains lead | ca. 3 m; Mains plug; CEE 7/VII |
| Fastening | Floor standing base |
| Life expectancy LED | L80B50 60.000h |
| Special features | Asymmetric radiation; Flicker-free; App control; Direct and indirect lighting component with edge light and light guide technology for a homogeneous light exit; PIR movement and daylight sensor; Magnetic control panel, freely positionable |