



Free-standing luminaire YARA.doubleU YUS 2/15000/VTL/R/WS/CEE/S0/C


114268000-00812019

Waldmann **W**

ENGINEERS OF LIGHT

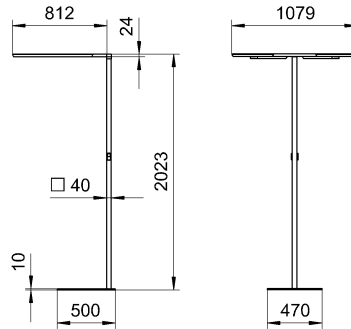

D43 ↓ 13.0% ↑ 87.0%

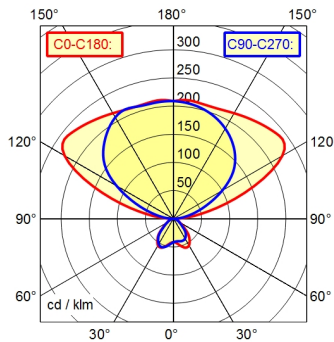

- Light source**
- Work equipment**
- Connected load**
- Power consumption**
- Power factor**
- Luminous flux**
- Luminous efficiency**
- Light type/-color**
- Colour temperatur**
- Color rendering index**
- Light distribution**
- Direct ratio**
- Chromaticity tolerance LED**
- Glare control**
- Luminance (L65)**
- Unified glare rating (4H 8H)**
- System of protection**
- Class of protection**
- Technology**
- Operation**
- Housing**
- Light source cover**
- Arm**
- Luminaire base**
- Weight (net)**
- Mains lead**
- Fastening**
- Life expectancy LED**
- Special features**

- LED
- Electronic ballast DALI
- 220 - 240 V; AC; 50 Hz; 60 Hz
- ca. 210 W; 214 W
- env. 0,966
- approx. 30.000 lm
- approx. 142 lm/W
- dynamic white; Warm white; Cold white; Daylight
- approx. 2.700 K; 6.500 K
- CRI ≥ 80
- Direct/indirect
- approx. 13 %
- < 3 SDCM
- Conical prismatic screen
- ≤ 2.700 cd/m²
- ≤ 16
- IP 20
- I
- Presence and daylight sensor control (PIR); DALI; Touch DIM; Wireless switch
- Aluminium/plastic; Powder coatet; White
- Acrylic (PMMA)
- Steel tube; Powder-coated; Tubular section upright; White; C-form flat
- ca. 26 kg
- ca. 3 m; Mains plug; CEE 7/VII
- Floor standing base
- L80B50 60.000h
- Asymmetric radiation; Flicker-free; App control; Direct and indirect lighting component with edge light and light guide technology for a homogeneous light exit; PIR movement and daylight sensor; TALK Bluetooth; Biodynamic light VTL; Magnetic control panel, freely positionable