


# Free-standing luminaire YARA.doubleU YUS 2/15000/VTL/R/SR/CEE/S0/C

114268000-00812374


# Waldmann **W**

ENGINEERS OF LIGHT

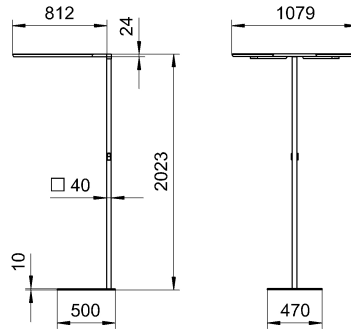

CEE 7/VII

D43 ↓ 13.0% ↑ 87.0%



**Light source**  
**Work equipment**  
**Connected load**  
**Power consumption**  
**Power factor**  
**Luminous flux**  
**Luminous efficiency**  
**Light type/-color**  
**Colour temperatur**  
**Color rendering index**  
**Light distribution**  
**Direct ratio**  
**Chromaticity tolerance LED**  
**Glare control**  
**Luminance (L65)**  
**Unified glare rating (4H 8H)**  
**System of protection**  
**Class of protection**  
**Technology**  
**Operation**  
**Housing**  
**Light source cover**  
**Arm**  
**Luminaire base**  
**Weight (net)**  
**Mains lead**  
**Fastening**  
**Life expectancy LED**  
**Special features**

LED  
 Electronic ballast DALI  
 220 - 240 V; AC; 50 Hz; 60 Hz  
 ca. 210 W; 214 W  
 env. 0,966  
 approx. 30.000 lm  
 approx. 142 lm/W  
 dynamic white; Warm white; Cold white; Daylight  
 approx. 2.700 K; 6.500 K  
 CRI ≥ 80  
 Direct/indirect  
 approx. 13 %  
 < 3 SDCM  
 Conical prismatic screen  
 ≤ 2.700 cd/m<sup>2</sup>  
 ≤ 16  
 IP 20  
 I  
 Presence and daylight sensor control (PIR); DALI;  
 Touch DIM  
 Wireless switch  
 Aluminium/plastic; Powder coatet; Silver metallic  
 Acrylic (PMMA)  
 Steel tube; Powder-coated; Tubular section  
 upright; Silver metallic  
 C-form flat  
 ca. 26 kg  
 ca. 3 m; Mains plug; CEE 7/VII  
 Floor standing base  
 L80B50 60.000h  
 Asymmetric radiation; Flicker-free; App control;  
 Direct and indirect lighting component with edge  
 light and light guide technology for a  
 homogeneous light exit; PIR movement and  
 daylight sensor; TALK Bluetooth; Biodynamic light  
 VTL; Magnetic control panel, freely positionable