



Free-standing luminaire YARA.doubleU YUS 2/15000/840/RX/SW/CEE/S0/C

114268000-00813289

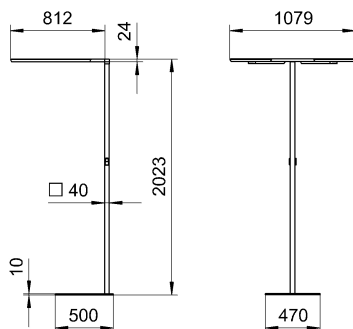

CEE 7/VII

D43 ↓ 13.0% ↑ 87.0%



| | |
|-------------------------------------|---|
| Light source | LED |
| Work equipment | Electronic ballast DALI |
| Connected load | 220 - 240 V; AC; 50 Hz; 60 Hz |
| Power consumption | ca. 210 W; 214 W |
| Power factor | env. 0,966 |
| Luminous flux | approx. 30.000 lm |
| Luminous efficiency | approx. 142 lm/W |
| Light type/-color | Cold white |
| Colour temperatur | approx. 4.000 K |
| Color rendering index | CRI ≥ 80 |
| Light distribution | Direct/indirect |
| Direct ratio | approx. 13 % |
| Chromaticity tolerance LED | < 3 SDCM |
| Glare control | Conical prismatic screen |
| Luminance (L65) | ≤ 2.700 cd/m ² |
| Unified glare rating (4H 8H) | ≤ 16 |
| System of protection | IP 20 |
| Class of protection | I |
| Technology | Multiple daylight-dependent motion sensors; DALI; Touch DIM; Wireless switch |
| Operation | |
| Housing | Aluminium/plastic; Powder coatet; Black |
| Light source cover | Acrylic (PMMA) |
| Arm | Steel tube; Powder-coated; Tubular section upright; Black; C-form flat |
| Luminaire base | |
| Weight (net) | ca. 26 kg |
| Mains lead | ca. 3 m; Mains plug; CEE 7/VII |
| Fastening | Floor standing base |
| Life expectancy LED | L80B50 60.000h |
| Special features | Asymmetric radiation; Flicker-free; App control; Optional LTX Cloud connection; Direct and indirect lighting component with edge light and light guide technology for a homogeneous light exit; LTX multisensor for workplace optimisation; TALK Bluetooth; Magnetic control panel, freely positionable |