




Free-standing luminaire YARA.quadH YHS 4/15000/VTL/R/WS/CEE/S0/R

114268000-00813495

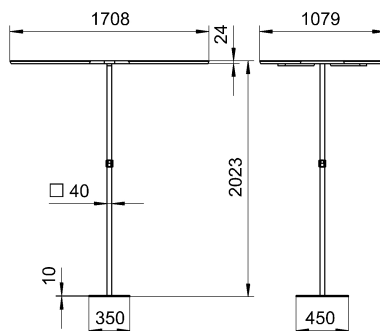

D43 ↓ 13.0% ↑ 87.0%

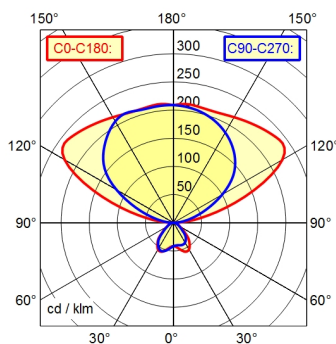

Light source	LED
Work equipment	Electronic ballast DALI
Connected load	220 - 240 V; AC; 50 Hz; 60 Hz
Power consumption	ca. 426 W; 428 W
Power factor	env. 0,966
Luminous flux	approx. 60.000 lm
Luminous efficiency	approx. 140 lm/W
Light type/-color	dynamic white; Warm white; Cold white; Daylight
Colour temperatur	approx. 2.700 - 6.500 K
Color rendering index	CRI ≥ 80
Light distribution	Direct/indirect
Direct ratio	approx. 13 %
Chromaticity tolerance LED	< 3 SDCM
Glare control	Conical prismatic screen
Luminance (L65)	≤ 2.700 cd/m ²
System of protection	IP 20
Class of protection	I
Technology	Presence and daylight sensor control (PIR); DALI; Touch DIM Wireless switch
Operation	
Housing	Aluminium/plastic; Powder coatet; White
Light source cover	Acrylic (PMMA)
Arm	Steel tube; Powder-coated; Tubular section upright; White
Luminaire base	Rectangular flat
Weight (net)	ca. 38 kg
Mains lead	ca. 3 m; Mains plug; CEE 7/VII
Fastening	Floor standing base
Life expectancy LED	L80B50 60.000h
Special features	Asymmetric radiation; Flicker-free; App control; Direct and indirect lighting component with edge light and light guide technology for a homogeneous light exit; PIR movement and daylight sensor; TALK Bluetooth; Biodynamic light VTL; Magnetic control panel, freely positionable