
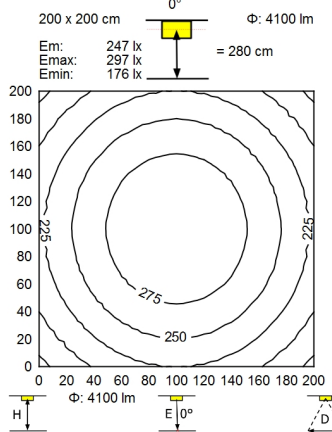


CE

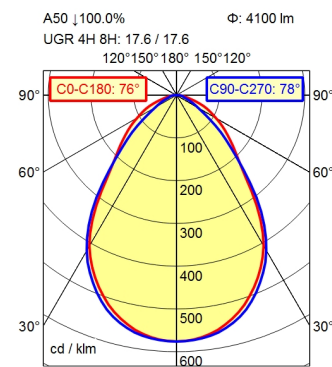

H	Φ: 4100 lm	E 0°	D
0.50 m		9450 lx	0.78 m 0.81 m
1.00 m		2362 lx	1.55 m 1.61 m
1.50 m		1050 lx	2.33 m 2.42 m
2.00 m		591 lx	3.11 m 3.22 m
2.50 m		378 lx	3.88 m 4.03 m
3.00 m		262 lx	4.66 m 4.84 m
3.50 m		193 lx	5.43 m 5.64 m

- Work equipment**
- Connected load**
- Power consumption**
- Standby**
- Power factor**
- Luminous flux**
- Luminous efficiency**
- Light type/-color**
- Colour temperatur**
- Color rendering index**
- Light distribution**
- Direct ratio**
- Beam angle**
- Chromaticity tolerance LED**
- Glare control**
- Luminance (L65)**
- Unified glare rating (4H 8H)**
- System of protection**
- Class of protection**
- Technology**
- Operation**
- Housing**
- Weight (net)**
- Mains lead**
- Design**
- Installation dimensions**
- Life expectancy LED**
- Special features**

- Electronic ballast
- 220 - 240 V; 50 Hz; 60 Hz
- ca. 30 W
- ca. 0,5 W
- env. 0,900
- approx. 4.100 lm
- approx. 136 lm/W
- Cold white
- approx. 4.000 K
- CRI ≥ 80
- Direct
- approx. 100 %
- 76° / 78°
- < 3 SDCM
- Conical prismatic screen
- ≤ 2.700 cd/m²
- ≤ 19
- IP 20
- II
- Switchable
- External
- Sectional aluminium; White
- ca. 3 kg
- ca. 0,5 m; Connector
- Integrated version
- ca. 625 mm; 625 mm
- L80B50 75.000h
- Flicker-free; Direct light component with edge light and light-guide technology for homogenous light exit; System dimension 625 x 625 mm; Strain relief with the possibility of through-wiring