


CEE 7/VII

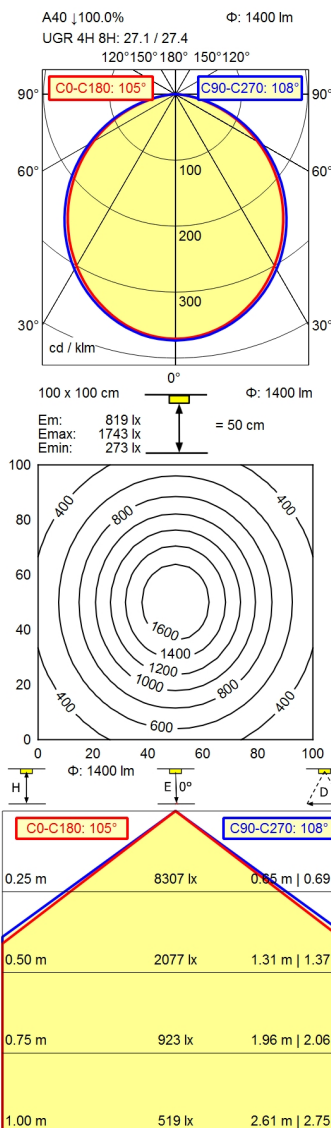

**Light source**

**Work equipment**

**Connected load**

**Secondary tension**

**Power consumption**

**Sec. power consumption**

**Luminous flux**

**Luminous efficiency**

**Light type/-color**

**Colour temperatur**

**Color rendering index**

**Light distribution**

**Direct ratio**

**Beam angle**

**Chromaticity tolerance LED**

**Luminance (L65)**

**Unified glare rating (4H 8H)**

**System of protection**

**Class of protection**

**Technology**

**Operation**

**Housing**

**Light source cover**

**Weight (net)**

**Mains lead**

**Design**

**Fastening**

**Special features**

LED

Electronic transformer

100 - 240 V; AC; 50 Hz; 60 Hz

24 V

ca. 23 W

ca. 19 W

approx. 1.400 lm

approx. 73 lm/W

Cold white

approx. 4.000 K

CRI ≥ 90; R9 ≥ 50

Direct

approx. 100 %

110°

< 3 SDCM

≤ 23.000 cd/m<sup>2</sup>

≤ 28

IP 20

I with plug-in power supply; III without plug-in

power supply

Continuously dimmable; Touch DIM

Multi-function switch

Sectional aluminium; Anodised; Aluminium

coloured anodised

Polycarbonate (PC); Milky

ca. 1,4 kg

ca. 4,7 m; Mains plug: CEE 7/VII

Mounted version

Screw-down bracket, horizontal

Fixed connection

