


3 pin

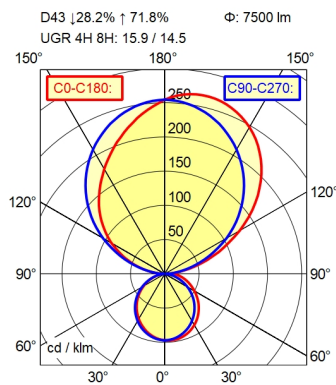

Work equipment

Connected load

Power consumption

Luminous flux

Luminous efficiency

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Direct ratio

Chromaticity tolerance LED

Glare control

Unified glare rating (4H 8H)

System of protection

Class of protection

Technology

Operation

Housing

Light source cover

Weight (net)

Mains lead

Design

Fastening

Minimum ambient temperature

Decorative contrast side parts

Special features

Power supply unit

220 - 240 V; AC; 50 Hz; 60 Hz

ca. 74 W

approx. 7.690 lm

approx. 103 lm/W

Warm white

approx. 3.000 K

CRI ≥ 80

Direct/indirect

approx. 28 %

< 3 SDCM

See luminaire type

≤ 16

IP 20

I

Two-stage switchable; -

External

Sectional aluminium; Anodised; Aluminium coloured anodised

Acrylic (PMMA); White opal

ca. 4 kg

Connection box; 3 pin

mounted version

Mounting rail

25 °C

White

General light, indirect, 3000K, Ra≥80; Night light; indirect; 3000K; Ra≥90; Reading light, direct, 3,00K, Ra≥80