
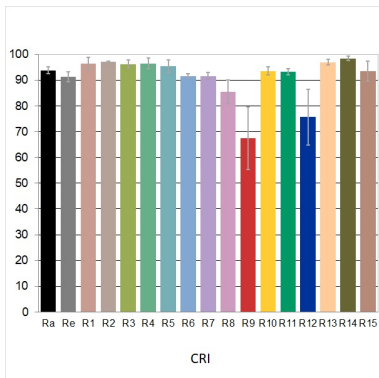
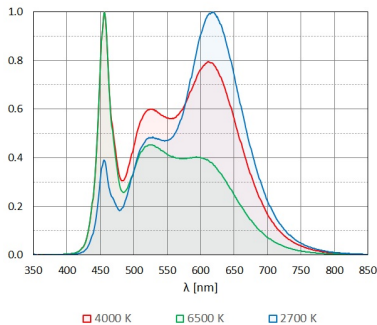


C53 | 41.1% ↑ 58.9% Φ: 6700 lm
UGR 4H 8H: 14.1 / 14.1



- Work equipment**
- Connected load**
- Power consumption**
- Luminous flux**
- Luminous efficiency**
- Light type/-color**
- Colour temperatur**
- Color rendering index**
- Light distribution**
- Direct ratio**
- Glare control**
- Luminance (L65)**
- Unified glare rating (4H 8H)**
- Class of protection**
- Technology**
- Operation**
- Housing**
- Light source cover**
- Weight (net)**
- Mains lead**
- Fastening**
- Configuration**
- Maximum ambient temperature**
- Special features**

- Power supply unit
- 220 - 240 V; AC; 50 Hz; 60 Hz
- ca. 61 W
- approx. 6.700 lm
- approx. 109 lm/W
- adjustable white
- approx. 2.700 - 6.500 K
- CRI ≥ 90; R9 ≥ 50
- Direct/indirect
- approx. 40 %
- Conical prismatic screen
- ≤ 2.800 cd/m²
- ≤ 16
- I
- Two-stage switchable; Continuously dimmable;
- DALI
- External
- Aluminium; Painted; White
- Acrylic (PMMA); Satine
- ca. 5,5 kg
- ca. 2 m; Connector; 5 pin
- Ceiling mounted
- Single Luminaire
- 25 °C
- Separated, direct and indirect light individually adjustable; External control device required for DALI Device Type 6; Biodynamic light VTL; Specified values at approx. 4000 K