


Wall-mounted luminaire ZERA ZEW 7000/830

114488000-00813015


Waldmann **W**

ENGINEERS OF LIGHT

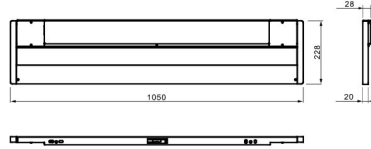

5 pin

D43 ↓24.6% ↑75.4% Φ: 6900 lm



Work equipment

Connected load

Power consumption

Luminous flux

Luminous efficiency

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

System of protection

Class of protection

Technology

Operation

Housing

Light source cover

Weight (net)

Mains lead

Design

Fastening

Maximum ambient temperature

Special features

Power supply unit

220 - 240 V; AC; 50 Hz; 60 Hz

ca. 64 W

approx. 7.090 lm

approx. 110 lm/W

Warm white

approx. 3.000 K

CRI ≥ 80

Direct/indirect

< 3 SDCM

See luminaire type

IP 20

I

Switchable

Switch

Sectional aluminium; Anodised; Aluminium
coloured anodised

Acrylic (PMMA); White opal

ca. 6,9 kg

Connector; 5 pin

mounted version

Wall bracket

25 °C

General light, indirect, 3000K, Ra≥80; Night light;
indirect; 3000K; Ra≥90; Reading light, direct, 3,00K,
Ra≥80