


Wall-mounted luminaire ZERA ZEW 9000/830/D

114494000-00812997

Waldmann **W**


ENGINEERS OF LIGHT

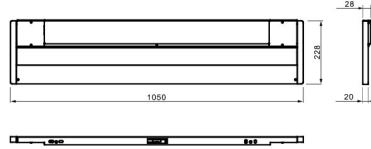

CE UK

5 pin

D43 | 31.5% ↑ 68.5% Φ: 7600 lm



Work equipment

Connected load

Power consumption

Luminous flux

Luminous efficiency

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

System of protection

Class of protection

Technology

Housing

Light source cover

Weight (net)

Mains lead

Design

Fastening

Maximum ambient temperature

Special features

Power supply unit

220 - 240 V; AC; 50 Hz; 60 Hz

ca. 86 W

approx. 8.500 lm

approx. 98 lm/W

Warm white

approx. 3.000 K

CRI ≥ 80

Direct/indirect

< 3 SDCM

See luminaire type

IP 20

I

Switchable

Sectional aluminium; Anodised; Aluminium
coloured anodised

Acrylic (PMMA); White opal

ca. 6,9 kg

Connector; 5 pin

mounted version

Wall bracket

25 °C

General light, indirect, 3000K, Ra≥80; Reading light,
direct, 2700K, Ra≥90; Examination light; direct;
4000K; 36W; Ra≥95; R9≥50; DALI Load 3x