


5 pin

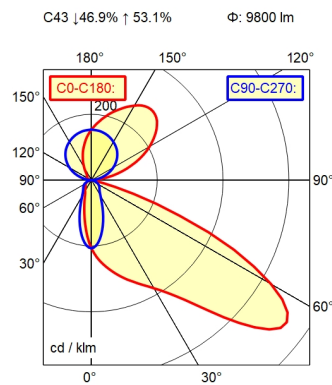

Work equipment	Power supply unit
Connected load	220 - 240 V; AC; 50 Hz; 60 Hz
Power consumption	ca. 119 W
Luminous flux	approx. 10.700 lm
Luminous efficiency	approx. 89 lm/W
Light type/-color	Warm white
Colour temperatur	approx. 3.000 K
Color rendering index	CRI ≥ 80
Light distribution	Direct/indirect
Chromaticity tolerance LED	< 3 SDCM
Glare control	See luminaire type
System of protection	IP 20
Class of protection	I
Technology	Switchable
Housing	Sectional aluminium; Anodised; Aluminium coloured anodised Acrylic (PMMA); White opal
Light source cover	
Weight (net)	ca. 6,9 kg
Mains lead	Connector; 5 pin
Design	mounted version
Fastening	Wall bracket
Maximum ambient temperature	25 °C
Special features	General light, indirect, 3000K, Ra≥80; Reading light, direct, 2700K, Ra≥90; Examination light; direct; direkt; 4000K; 60W; Ra≥95; R9≥50; General light and night light DALI; DALI Load 3x