


Free-standing luminaire LAVIGO

DPS 14000/840/D/G2

121798000-00803270


Waldmann **W**

ENGINEERS OF LIGHT

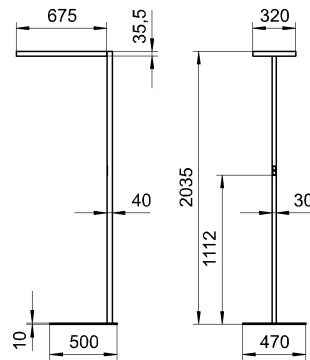

CEE 7/VII

D53 | 12.5% | 87.5% Φ : 14050 lm
UGR 4H 8H: <10 / <10



Light source

Work equipment

Connected load

Power consumption

Power factor

Luminous flux

Luminous efficiency

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Direct ratio

Chromaticity tolerance LED

Glare control

Luminance (L65)

Unified glare rating (4H 8H)

System of protection

Class of protection

Technology

Operation

Housing

Light source cover

Arm

Luminaire base

Weight (net)

Mains lead

Fastening

Decorative contrast side parts

Life expectancy LED

Special features

LED

Electronic ballast

220 - 240 V; AC; 50 Hz; 60 Hz

ca. 93 W

env. 0,943

approx. 14.050 lm

approx. 151 lm/W

Cold white

approx. 4.000 K

CRI \geq 80

Direct/indirect

approx. 13 %

< 3 SDCM

Conical prismatic screen

\leq 3.000 cd/m²

\leq 16

IP 20

I

Continuously dimmable; DALI

Multi-function switch

Steel/plastic; Painted; Silver metallic

Acrylic (PMMA); Satine

Steel tube; Painted; Tubular section upright; Silver metallic

C-form flat

ca. 19,7 kg

ca. 3 m; Mains plug: CEE 7/VII

Floor standing base

Metallic silver

L80B50 60.000h

Separated, direct and indirect light individually adjustable; Flicker-free; Cradle to Cradle Certified TM; Direct light component with edge light and light-guide technology for homogenous light exit; Luminaire head detachable