


CEE 7/VII

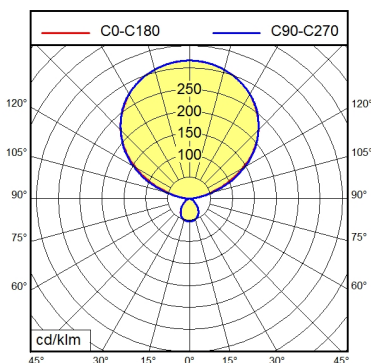

| | |
|---------------------------------------|--|
| Light source | LED |
| Work equipment | Electronic ballast DALI |
| Connected load | 220 - 240 V; AC; 50 Hz; 60 Hz |
| Power consumption | ca. 112 W |
| Power factor | env. 0,940 |
| Luminous flux | approx. 16.450 lm |
| Light type/-color | Cold white |
| Colour temperatur | approx. 4.000 K |
| Color rendering index | CRI ≥ 80 |
| Light distribution | Direct/indirect |
| Direct ratio | approx. 11 % |
| Chromaticity tolerance LED | < 3 SDCM |
| Glare control | Conical prismatic screen |
| Luminance (L65) | ≤ 2.800 cd/m ² |
| Unified glare rating (4H 8H) | ≤ 16 |
| System of protection | IP 20 |
| Class of protection | I |
| Technology | Presence and daylight sensor control (PIR); DALI; Touch DIM Multi-function switch |
| Operation | |
| Housing | Steel/plastic; Powder coatet; Silver metallic |
| Light source cover | Polycarbonate (PC); Clear; Structured |
| Arm | Steel tube; Powder-coated; Tubular section upright; Silver metallic |
| Luminaire base | C-form flat |
| Weight (net) | ca. 21,4 kg |
| Mains lead | ca. 3 m; Mains plug; CEE 7/VII |
| Fastening | Floor standing base |
| Decorative contrast side parts | Metallic silver |
| Life expectancy LED | L80B50 60.000h |
| Special features | Integrated light and presence sensor PIR; Separated, direct and indirect light individually adjustable; Retrofittable with TALK module; Flicker- free; Cradle to Cradle Certified TM; Direct light component with edge light and light-guide technology for homogenous light exit; Luminaire head detachable |