


CEE 7/VII

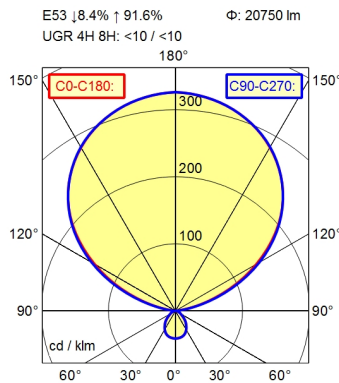

Light source	LED
Work equipment	Electronic ballast DALI
Connected load	220 - 240 V; AC; 50 Hz; 60 Hz
Power consumption	ca. 142 W
Power factor	env. 0,948
Luminous flux	approx. 20.750 lm
Luminous efficiency	approx. 146 lm/W
Light type/-color	Cold white
Colour temperatur	approx. 4.000 K
Color rendering index	CRI ≥ 80
Light distribution	Direct/indirect
Direct ratio	approx. 8,4 %
Chromaticity tolerance LED	< 3 SDCM
Glare control	Conical prismatic screen
Luminance (L65)	≤ 2.800 cd/m ²
Unified glare rating (4H 8H)	≤ 16
System of protection	IP 20
Class of protection	I
Technology	Presence and daylight sensor control (PIR); DALI; Touch DIM Multi-function switch
Operation	
Housing	Steel/plastic; Powder coatet; White
Light source cover	Polycarbonate (PC); Clear; Structured
Arm	Steel tube; Powder-coated; Tubular section upright; White
Luminaire base	C-form flat
Weight (net)	ca. 15,4 kg
Mains lead	ca. 3 m; Mains plug; CEE 7/VII
Fastening	Floor standing base
Decorative contrast side parts	Flint grey
Life expectancy LED	L80B50 60.000h
Special features	Integrated light and presence sensor PIR; Separated, direct and indirect light individually adjustable; Retrofittable with TALK module; Flicker-free; Cradle to Cradle Certified TM; Direct light component with edge light and light-guide technology for homogenous light exit; Luminaire head detachable