


CEE 7/VII

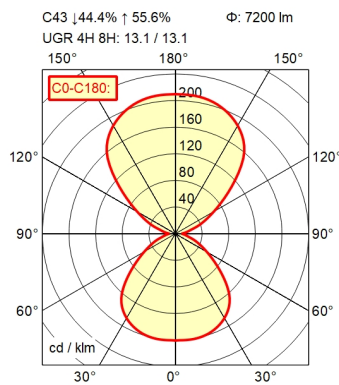

Work equipment

Connected load

Power consumption

Luminous flux

Luminous efficiency

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Direct ratio

Chromaticity tolerance LED

Glare control

Luminance (L65)

Unified glare rating (4H 8H)

System of protection

Class of protection

Technology

Operation

Housing

Light source cover

Arm

Luminaire base

Weight (net)

Mains lead

Fastening

Electronic ballast

220 - 240 V; AC; 50 Hz; 60 Hz

ca. 79 W

approx. 7.200 lm

approx. 91 lm/W

Warm white

approx. 3.000 K

CRI \geq 90

Direct/indirect

approx. 44 %

< 3 SDCM

See luminaire type

\leq 1.600 cd/m²

\leq 16

IP 20

I

Continuously dimmable; DALI

Pull cord

Polyethylene(PE); Untreated; Anthracite

Polycarbonate (PC); Satine

Steel tube; Painted; Tubular section upright;

Anthracite grey

Round (flat)

ca. 12,3 kg

ca. 2,2 m; Mains plug: CEE 7/VII

Floor standing base