


CE

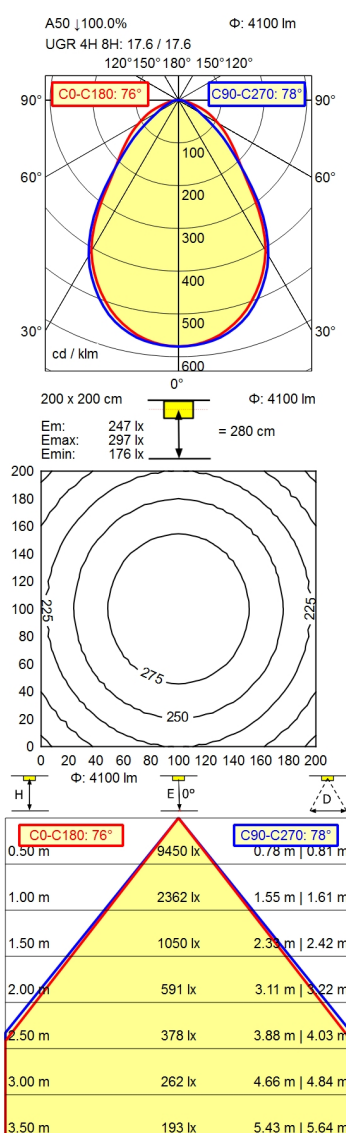

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Direct ratio

Beam angle

Chromaticity tolerance LED

Glare control

Luminance (L65)

Unified glare rating (4H 8H)

System of protection

Class of protection

Technology

Operation

Housing

Weight (net)

Mains lead

Design

Installation dimensions

Life expectancy LED

Special features

Electronic ballast

220 - 240 V; 50 Hz; 60 Hz

ca. 30 W

ca. 0,5 W

env. 0,900

approx. 4.100 lm

approx. 136 lm/W

Cold white

approx. 4.000 K

CRI ≥ 80

Direct

approx. 100 %

76° / 78°

< 3 SDCM

Conical prismatic screen

≤ 2.700 cd/m²

≤ 19

IP 20

II

Switchable

External

Sectional aluminium; White

ca. 2,9 kg

ca. 0,5 m; Connector

Integrated version

ca. 600 mm; 600 mm

L80B50 75.000h

Flicker-free; Direct light component with edge light and light-guide technology for homogenous light exit; System dimension 600 x 600 mm; Strain relief with the possibility of through-wiring