


# Free-standing luminaire LAVIGO

## DPS 12000/840/R/G2

121785000-00741860

# Waldmann **W**


ENGINEERS OF LIGHT

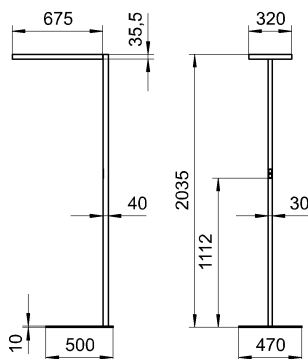

CEE 7/VII

D53 | 15.0% | 85.0%       $\Phi$ : 11650 lm

UGR 4H 8H: <10 / <10



**Light source**

**Work equipment**

**Connected load**

**Power consumption**

**Power factor**

**Luminous flux**

**Luminous efficiency**

**Light type/-color**

**Colour temperatur**

**Color rendering index**

**Light distribution**

**Direct ratio**

**Chromaticity tolerance LED**

**Glare control**

**Luminance (L65)**

**Unified glare rating (4H 8H)**

**System of protection**

**Class of protection**

**Technology**

**Operation**

**Housing**

**Light source cover**

**Arm**

**Luminaire base**

**Weight (net)**

**Mains lead**

**Fastening**

**Decorative contrast side parts**

**Life expectancy LED**

**Special features**

LED

Electronic ballast

220 - 240 V; AC; 50 Hz; 60 Hz

ca. 77 W

env. 0,93

approx. 11.650 lm

approx. 151 lm/W

Cold white

approx. 4.000 K

CRI  $\geq$  80

Direct/indirect

approx. 15 %

< 3 SDCM

Conical prismatic screen

$\leq$  3.000 cd/m<sup>2</sup>

$\leq$  16

IP 20

I

Presence and daylight sensor control (PIR); DALI

Multi-function switch

Steel/plastic; Painted; Silver metallic

Acrylic (PMMA); Satine

Steel tube; Painted; Tubular section upright; Silver metallic

C-form flat

ca. 19,7 kg

ca. 3 m; Mains plug: CEE 7/VII

Floor standing base

Metallic silver

L80B50 60.000h

Integrated light and presence sensor PIR;  
Separated, direct and indirect light individually adjustable; Retrofittable with TALK module; Flicker-free; Cradle to Cradle Certified TM; Direct light component with edge light and light-guide technology for homogenous light exit; Luminaire head detachable