


CEE 7/VII

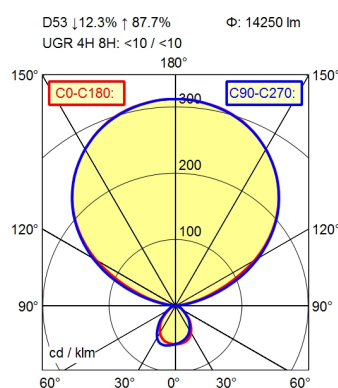

Light source	LED
Work equipment	Electronic ballast
Connected load	220 - 240 V; AC; 50 Hz; 60 Hz
Power consumption	ca. 100 W
Power factor	env. 0,965
Luminous flux	approx. 14.250 lm
Luminous efficiency	approx. 142 lm/W
Light type/-color	direct static white; indirectly dynamic white
Colour temperatur	approx. 4.000 K; 3.000 - 6.500 K
Color rendering index	CRI \geq 80
Light distribution	Direct/indirect
Direct ratio	approx. 12 %
Glare control	Conical prismatic screen
Luminance (L65)	\leq 3.000 cd/m ²
Unified glare rating (4H 8H)	\leq 16
System of protection	IP 20
Class of protection	I
Technology	Presence and daylight sensor control (PIR); DALI
Operation	Multi-function switch
Housing	Steel/plastic; Painted; Silver metallic
Light source cover	Acrylic (PMMA); Satine
Arm	Steel tube; Painted; Tubular section upright; Silver metallic
Weight (net)	ca. 15,4 kg
Mains lead	ca. 3,7 m; Mains plug; CEE 7/VII
Fastening	Socket; Table adaptor
Minimum ambient temperature	25 °C
Maximum ambient temperature	25 °C
Decorative contrast side parts	Metallic silver
Life expectancy LED	L80B50 60.000h
Special features	Integrated light and presence sensor PIR; Separated, direct and indirect light individually adjustable; Retrofittable with TALK module; Flicker-free; Inclination of tubular section adjustable; Cradle to Cradle Certified TM; Direct light component with edge light and light-guide technology for homogenous light exit; Indirect light component biodynamic light VTL, direct light component neutral working light; Integrated light management for biodynamic light VTL; Luminaire head detachable